

DOOR SILLS

Features & Benefits

GPIMILLWORKS

www.gpimillworks.com

Outswing Door Sills

Entry and Patio

Patent Applied

WEATHER RESISTANT



- Solid foam PVC cap and base provides added thermal resistance (thermally-broken)
- Non-rot, water and termite resistant
- Closed-cell foam end gaskets

VERSATILE


- Full-width solid base makes for easy door width cut-downs
- Outswing cap design can be used in the same sill base as the inswing entry or patio
- Outswing cap available in a standard height (1.50") with butyl adhesive seal and a high dam height (1.75") with butyl adhesive seal
- Reduces inventory SKUs
- PVC foam extender can be used for two additional sill sizes (6-9/16" & 5-1/4")
- 2" with butyl adhesive (6-9/16" sill option)
- 11/16" cut-down (5-1/4" sill option)

OPTIONS

- Offered in four finishes: Mill, Satin Nickel, Bright Brass, and Dark Bronze
- True 4-9/16" sill available (entry door only)

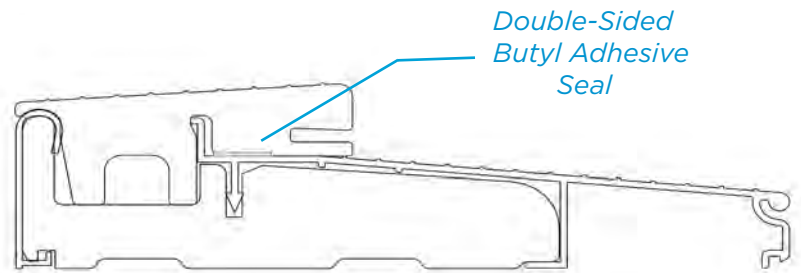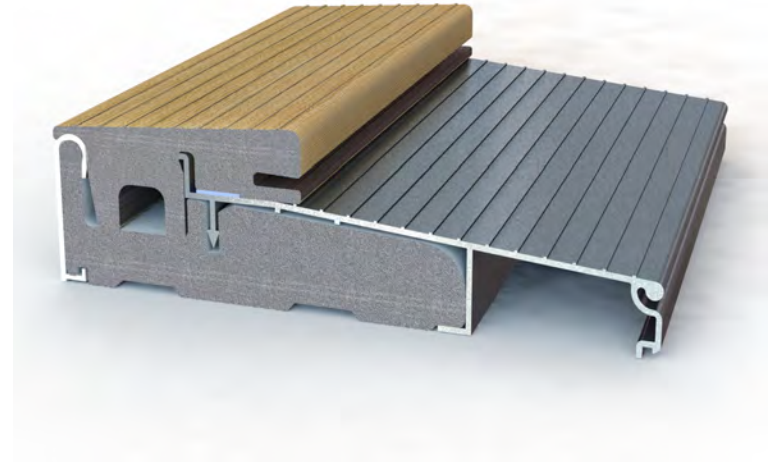

LOW DAM OUTSWING DOOR SILL

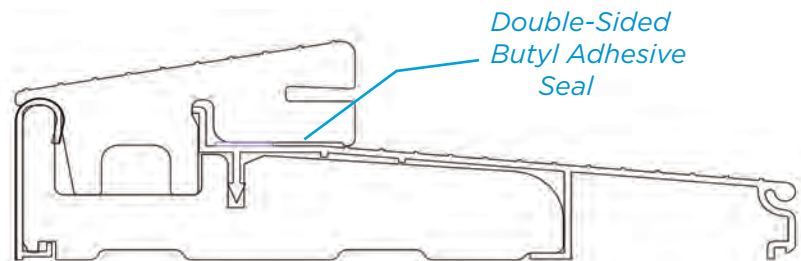

HIGH DAM OUTSWING DOOR SILL

SALES CONTACT

Terry Wiley

256.452.1944

terry.wiley@gpimillworks.com



GPI Millworks

2003 S Bibb Drive

Tucker, GA 30084

www.gpimillworks.com